Female Header Dual Entry 8,50 Height, 2,54 mm

Series **299**



Rated current	3,0 A
Rated voltage	250 VRMS / VDC Please consider air- and creepage distances
Withstand voltage	500 VRMS for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-40°C to +105°C
Max. processing temper.	260°C for 10 seconds

All dimensions in mm.

pitch **2,54**

termination **T**

mating pin size **□ 0,64**

max. pincount **090**

Product group **4**

Variation		PCB Layout
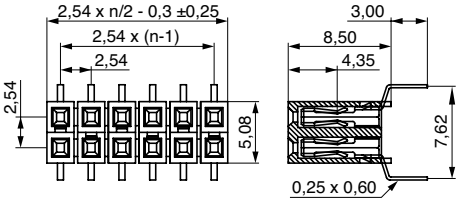	1	
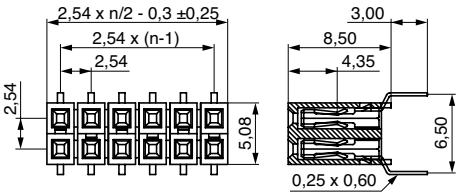	2	
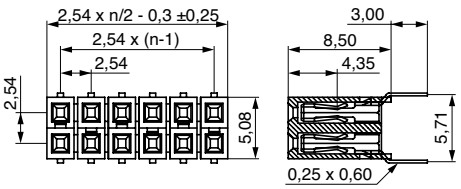	3	
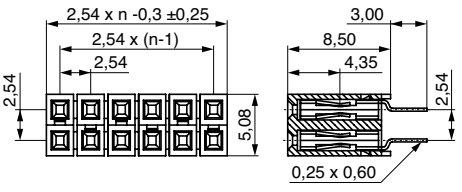	4	

Plating:
T = Sn
F = Au
S = Selective Au

Packaging:
T = Tube

Order code: 299-?-???-0-N?X-YT0

Variation (1,2,3,4) | No. of contacts (004,... - 090) | Plating contact (T,F,S) | Packaging

www.mpe-connector.de

CS31103_V6

Mating series	087	089	090	585	088	334	368	296
see page	3-37	3-38	3-39	3-40	3-41	3-42	3-43	3-53

MPE-Garry GmbH • Schäfflerstraße 13 • 87629 Füssen • Germany • Phone: +49 (0) 83 62 / 91 56-0 • Fax: +49 (0) 83 62 / 91 56-500 • Email: vk@mpe-connector.de • www.mpe-connector.de